


# Small Special Order DC Disconnects


- 10 Piece Minimum Order
- 4 – 6 Weeks Lead Time
- 600 VDC
- UL 508



*Disconnects up to 4 individual poles...*

 Din Rail Type [B]	Amperage	Voltage	Poles	Part Number
	16 AMPS	600 VDC	1 Pole	X60.16BKS1-R
	16 AMPS	600 VDC	2 Pole	X60.16BKS2-R
	16 AMPS	600 VDC	3 Pole	X60.16BKS3-R
	16 AMPS	600 VDC	4 Pole	X60.16BKS4-R
	25 AMPS	600 VDC	1 Pole	X60.25BKS1-R
	25 AMPS	600 VDC	2 Pole	X60.25BKS2-R
	25 AMPS	600 VDC	3 Pole	X60.25BKS3-R
	25 AMPS	600 VDC	4 Pole	X60.25BKS4-R
	32 AMPS	600 VDC	1 Pole	X60.32BKS1-R
	32 AMPS	600 VDC	2 Pole	X60.32BKS2-R
	32 AMPS	600 VDC	3 Pole	X60.32BKS3-R
	32 AMPS	600 VDC	4 Pole	X60.32BKS4-R

## Dimensions

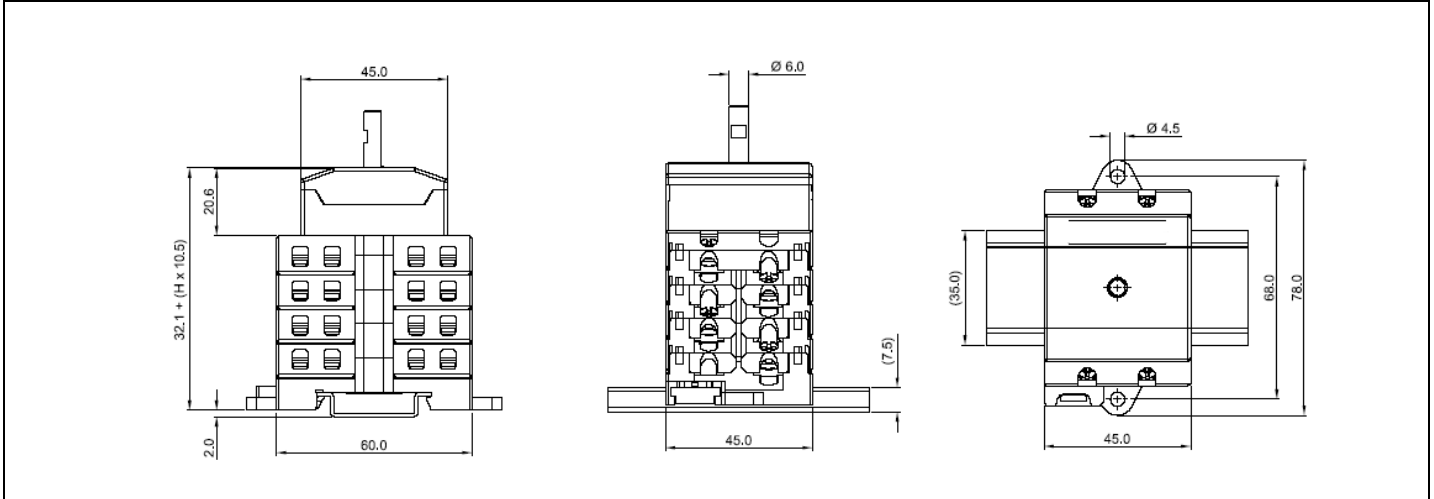

## Accessories

- *Specifically designed for the solar industry*
- *Very compact design*
- *Short power shut off time of approx. 3ms*
- *Up to 32 AMPS per pole*
- *Can switch both AC & DC*
- *Meets UL508 and IEC60947-1/3*

